


CROSS - SECTION

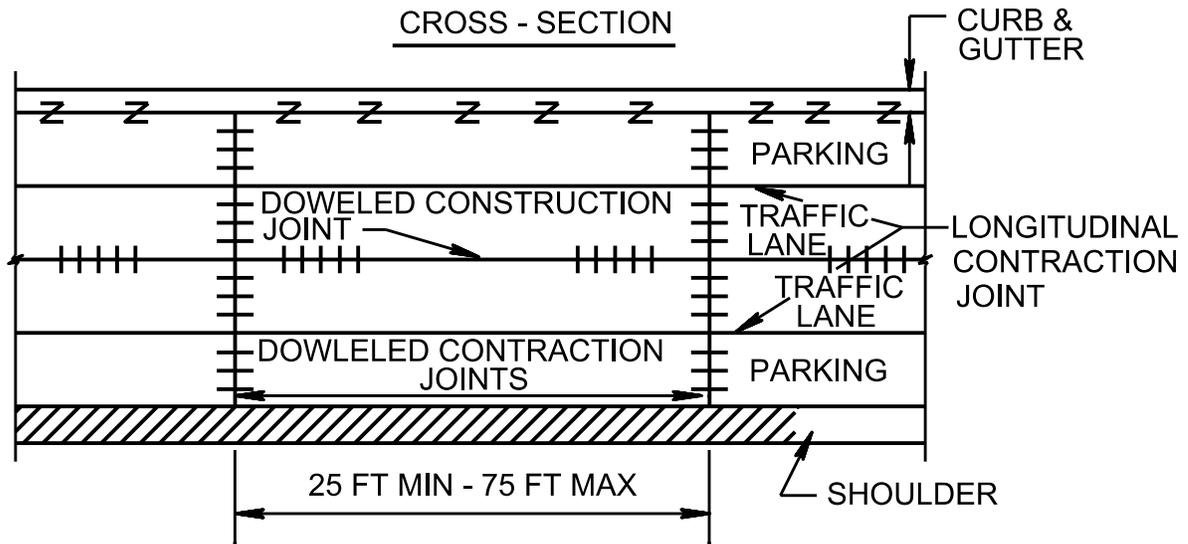

PLAN - VIEW

- DOWEL: SEE TABLE IN NOTE SECTION FOR DOWEL SIZE AND SPACING
- Z TIE BARS: NO. 5 DEFORMED STEEL BARS 30" IN LENGTH, AND SPACED ON 30" CENTERS

REFERENCE:

TM 5-822-6/AFM  
88-7, CHAPTER 1,  
RIGID PAVEMENT FOR  
ROADS, STREETS, WALKS  
& OPEN STORAGE AREAS

- Ⓐ END REINFORCING STEEL 3" FROM JOINT REINFORCING STEEL IS CARRIED THROUGH THE LONGITUDINAL CONTRACTION JOINT ONLY DOWELED CONSTRUCTION JOINTS IN CONCRETE PAVEMENTS WITH 4 OR MORE LANES

REINFORCED CONCRETE PAVEMENTS  
FOR FOUR-LANE ROADS & STREETS

DATE  
AUG 1992

FIGURE  
2-31b